


# Novel Post Combustion CO<sub>2</sub> Capture (PCC) Process - MU Static Spiral Perforated Wings (MU-SSPW) Mixing Element -

1<sup>st</sup> November, 2015

Mu Company Ltd. & K-Coal Co., Ltd.

## Post Combustion CO<sub>2</sub> Capture (PCC) Process

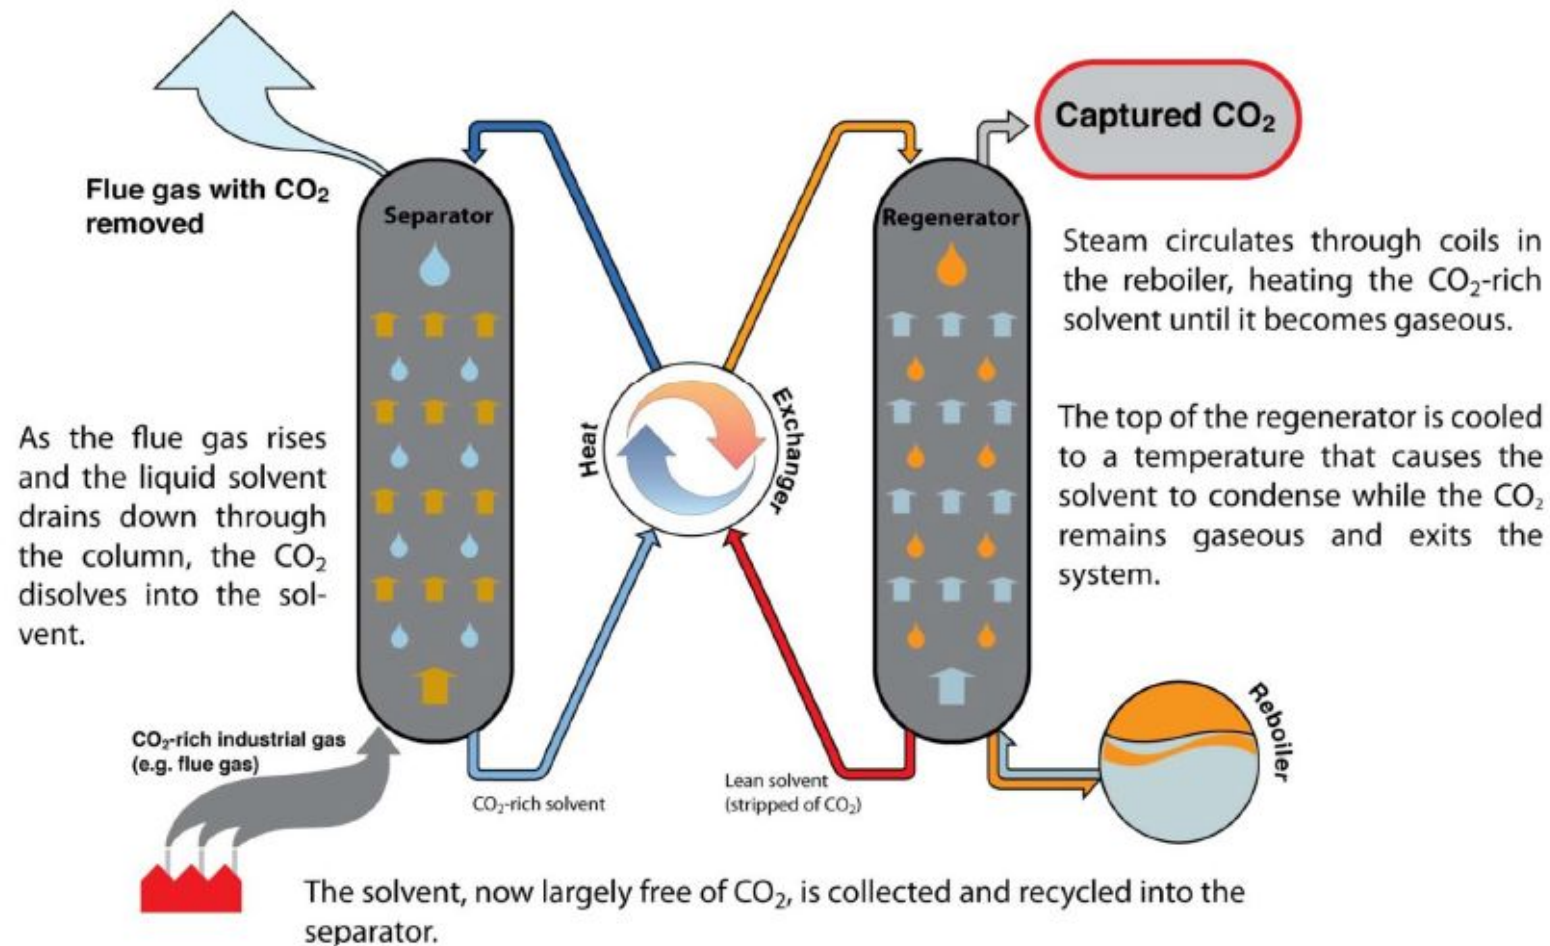

# Proposal on R&D

Japanese Technology Venture “Mu Company Ltd.” developed Mu Static Spiral Perforated Wings (MU-SSPW) Mixing Element and had its patent in Japan, USA, EU and China.


The absorbent of CO<sub>2</sub> and CO<sub>2</sub> capture system in Post Combustion CO<sub>2</sub> Capture (PCC) process have been developed by many companies and institute but the reactor of CO<sub>2</sub> capture such as absorber & stripper has not been well developed yet.

Mu-SSPW Mixing Element has a big potential to improve energy efficiency of CO<sub>2</sub> capture system and also to reduce the size of CO<sub>2</sub> absorber and stripper.

Mu Company Ltd. and K-Coal Co., Ltd. plan to conduct CO<sub>2</sub> capture test by utilizing MU-SSPW Mixing Element as CO<sub>2</sub> absorber and stripper in cooperation with the developer PCC process.

**We propose to commercialize Mu-SSPW Mixing Element for CO<sub>2</sub> capture new system by utilizing new PCC Process pilot plant and or existing PCC pilot plant in the World.**

## Concept of R&D Project

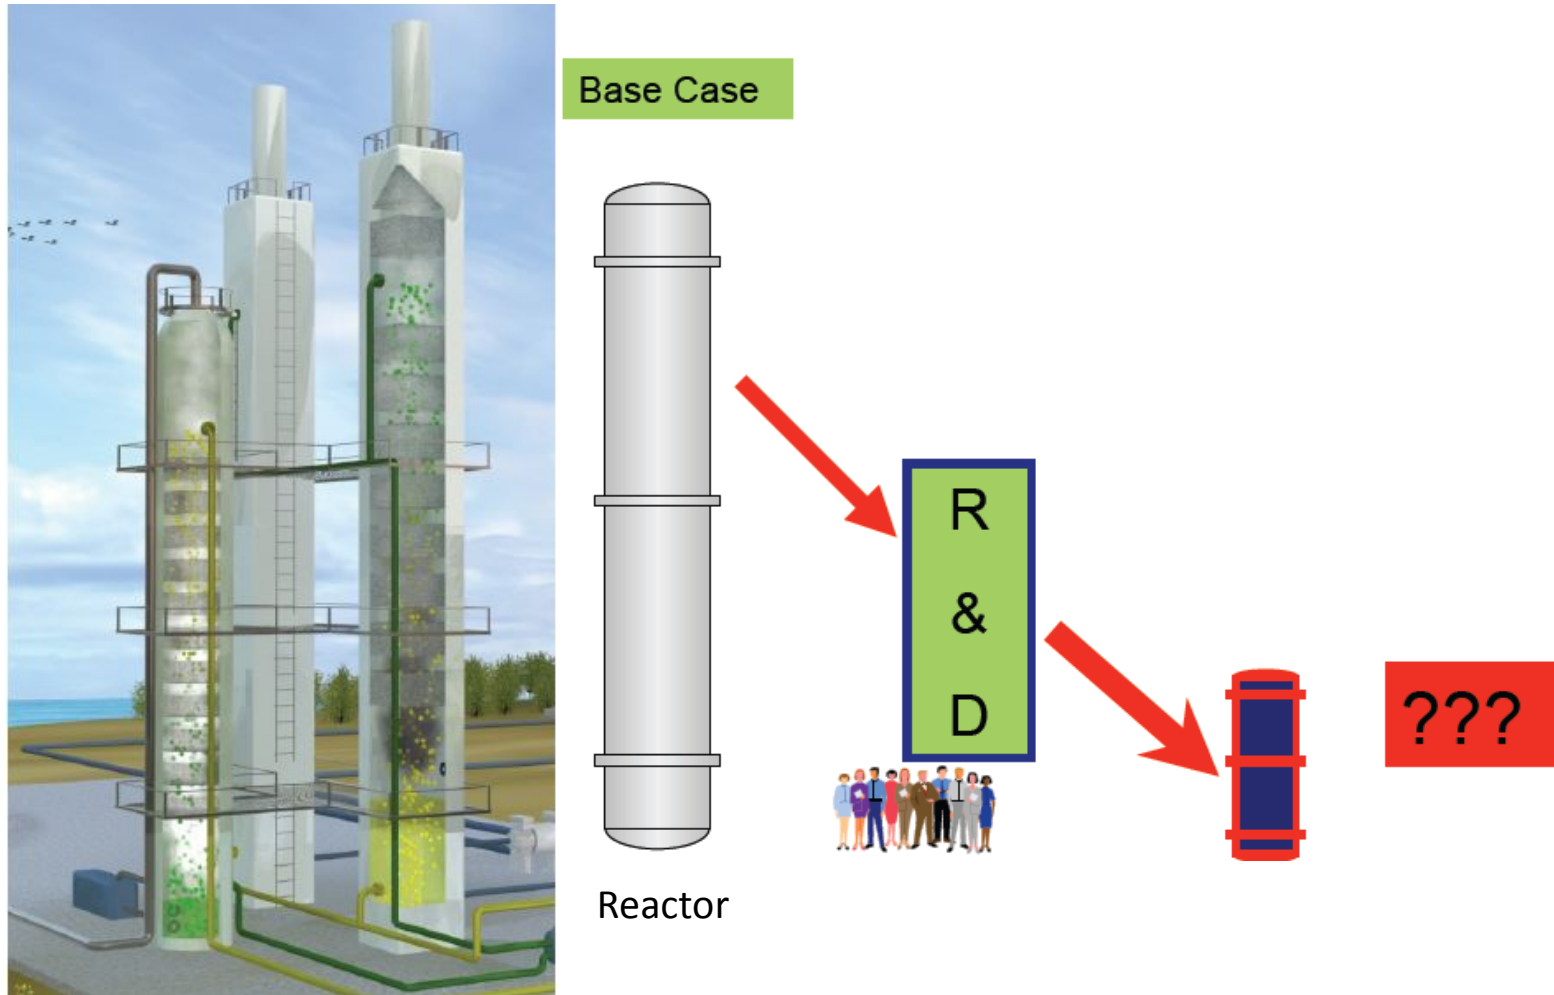

# MU Static Spiral Perforated Wings (MU-SSPW) Mixing Element for CO<sub>2</sub> absorber & stripper

**We can solve the problem of upsizing and  
fouling of the tower using  
MU-STATIC SPIRAL PERFORATED WINGS ( MU-SSPW )**

MU-SSPW is the internals of towers with static spiral perforated wings.

We have been solving the problems mentioned above for 30 years.

Please realize the ability of MU-SSPW.

MU-SSPW is the innovative internals having completely different concept from TRAY and PACKING.

MU-SSPW is most suitable to adopt for the large-scale tower of CCS in particular.

MU-SSPW has the following excellent features.

Supporting documents:

Attachment-1 The features of MU-SSPW

( REVOLUTION OF INTERNALS BY MU - SSPW )

Attachment-2 Merit by adopting MU-SSPW in CCS

瀧は 怒濤は  
なぜ白く観えるのか

- ・ ガス吸収  
Gas Absorption
- ・ 曝気  
Aeration
- ・ 放散  
Stripping

エレメントの構造：

パイプ内に右捻り及び左捻りの螺旋状の多孔板を内設したミューミキシングエレメントが交互に配置されています。

基本的な働き：

原水と空気は、複数のミューミキシングエレメントを通過する間に左右両方向の回転及び分割、合流、反転、剪断応力作用を連続的に繰り返しながら、高効率で原水と空気とが接触・攪拌・混合して放散されます。

放散塔内で：

各ミューミキシングエレメントの径方向及び軸方向上で、下方向に滝のように流下する原水と、その中を上昇する微細な気泡とが、怒濤のように激しく接触・攪拌・混合されます。その結果、高効率で原水は処理されます。

**LL** MU COMPANY LTD.



WATERFALLS,  
SURGING WATERS,  
WHY DO THEY LOOK WHITE?

- ・ ミューミキサー  
MU Mixer
- ・ ミュースクラバー  
MU Scrubber
- ・ ミューリアクター  
MU Reactor

STRUCTURE：

Right-twisted blades element and left-twisted blades element are vertically set in alternative in the column.

PRINCIPAL FUNCTION：

Raw water (wastewater) and gas (air) are fed into the column; water from the top and gas blown in from the bottom. While passing through several mixing elements, both air and raw water get efficiently in contact each other, stirred, mixed and stripped.

APPLYING TO STRIPPING：

While raw water falls down like a waterfall in the column, fine water bubbles being rich of air climb up in the falling water from the bottom, to contact, stir and mix like surging waves in the ocean for efficient reaction on axial and radial directions, to accomplish wastewater treatment at high rate.



・ ミューミキシングエレメント  
MU Mixing Element



**LL** 株式会社ミューカンパニーリミテド

© 2001.4

(12) **United States Patent**  
Kojima

(10) **Patent No.:** US 7,510,172 B2  
(45) **Date of Patent:** Mar. 31, 2009

(54) **MIXING ELEMENT AND STATIC FLUID MIXER USING SAME**

5,104,233 A 4/1992 Kojima  
5,605,400 A 2/1997 Kojima  
5,945,039 A 8/1999 Kojima

(75) **Inventor:** Hisao Kojima, Kanagawa (JP)

(73) **Assignee:** Anemos Company Ltd., Tokyo (JP)

(\*) **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 568 days.

(Continued)  
**FOREIGN PATENT DOCUMENTS**

EP 0 678 329 9/1998

(21) **Appl. No.:** 11/276,340

(Continued)

(22) **Filed:** Feb. 24, 2006

**OTHER PUBLICATIONS**

(65) **Prior Publication Data**  
US 2007/0205523 A1 Sep. 6, 2007

S.J. Chen et al.; Static Mixing Handbook; Chemical Research Institute, Jun. 1973.

(Continued)

**Related U.S. Application Data**

*Primary Examiner*—Scott Bushey

(63) Continuation-in-part of application No. PCT/JP2004/001631, filed on Feb. 16, 2004.

(74) *Attorney, Agent, or Firm*—Sonnenschein Nath & Rosenthal LLP

(51) **Int. Cl.**  
**B01F 3/04** (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.** ..... 261/79.2; 261/113; 96/296; 96/326; 366/339; 366/340

(58) **Field of Classification Search** ..... 261/79.1, 261/79.2, 94, 113; 96/296, 314, 320, 324, 96/326; 366/338, 339, 340, 341  
See application file for complete search history.


A mixing element, which is produced at low cost, has high mixture agitation effectiveness, and is easily made large, and a static fluid mixer using the mixing element are provided. Further, a gas-liquid treatment apparatus with high treatment ability is provided. A mixing element 1 includes: a cylindrical passage tube 2 through which fluid flows; a plurality of spiral rightward rotation type first blades 3 formed of a perforated object, which are provided in the passage tube 2; a first inner cylindrical tube 5 shaped like a cylinder and disposed inside the blades 3; a plurality of spiral rightward rotation type blades 6 provided in the inner cylindrical tube 5; and an opening 9 formed in the axial center portion of the blades 6. A static fluid mixer is formed by using at least one mixing element 1 mentioned above.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

2,317,101 A \* 4/1943 Lecky ..... 261/79.2  
3,348,830 A \* 10/1967 Pearl et al. .... 261/161  
3,582,051 A \* 6/1971 Klein et al. .... 261/79.2  
4,466,741 A 8/1984 Kojima  
4,533,015 A 8/1985 Kojima  
4,747,697 A 5/1988 Kojima  
4,878,925 A 11/1989 Kojima

24 Claims, 27 Drawing Sheets

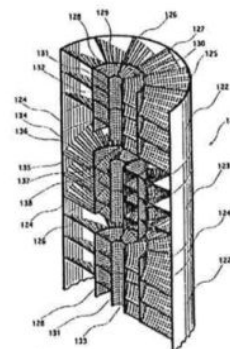

 MU Company LTD  
MU-SSPW Mixing Element Supply List



*K-Coal*

Costomer	Equipment	Purpose
1	Scrubber	Gas cooling & recovery of Si , removal of SiO <sub>2</sub> & HCl
2	Scrubber	Removal of SiO <sub>2</sub> & HCl in waste gas from incinerator Removal of SiHC <sub>3</sub> . SiCl <sub>4</sub> with hydrolysis
3	Scrubber	Removal of SiO <sub>2</sub> , Cl <sub>2</sub> , F, SiCl <sub>4</sub>
4	Scrubber	Removal of Triethylamine, NH <sub>3</sub> , H <sub>2</sub> S
5	Scrubber	Condensation and recovery of TiCl <sub>4</sub>
6	Scrubber	Removal of organic fume and organic acid
7	Scrubber	Recovery of ethanol and removal of medical fume
8	Reactor	Production of Cl <sub>2</sub> aqueous solution and chlorinate organic compound
9	Scrubber	Removal of chemical dye fume
10	Scrubber	Removal by adsorption of SO <sub>x</sub> and H <sub>2</sub> S in waste gas
11	Reactor	Removal of VOC in calcium system waste water
12	Scrubber	Removal and recovery of methylene chloride
13	Mixer	Mixing of cement and binding agent
14	Mixer	Mixing of reduced iron pellet
15	Scrubber	Recovery of uranium compounders (A.D.U.) fume
16	Scrubber	Removal of UF <sub>6</sub> gas in case of emergency
17	Scrubber	Removal of high concentrated HCl gas
18	Reactor	Removal of COD compounds in waste water
19	Aerator	Removal of BOD compounds in waste water

INSTALLATION  
OF  
MU-STATIC SPIRAL PERFORATED WINGS ( MU-SSPW )

SPIRAL FLOW WITH COUNTER-CLOCKWISE

SPIRAL FLOW WITH CLOCKWISE

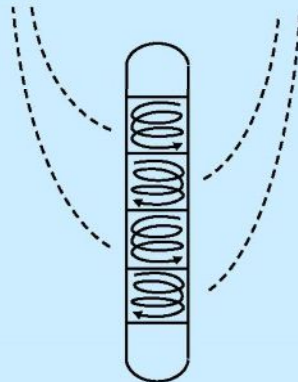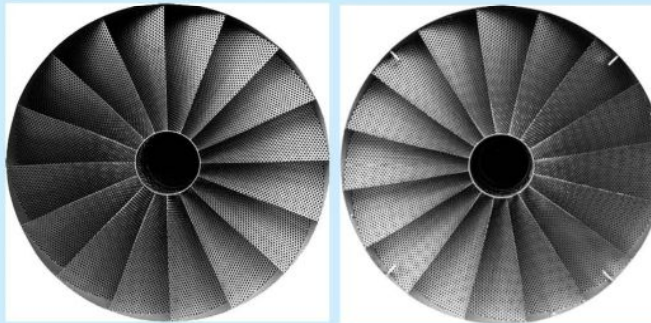

## Mu Scrubber Scale Up

➤ Track Record of Mu Scrubber

1) Dust Remover :  $\phi 1.8 \text{ m} \times 5.6 \text{ m H}$

Gas Flow 90,000Nm<sup>3</sup>/h

2) Desulfurization ( $\text{Ca(OH)}_2/\text{Ma(OH)}_2$ ) :  $\phi 0.5 \text{ m} \times 5 \text{ m}$

Gas Flow 3,000Nm<sup>3</sup>/h

➤ Maximum Size (Transportable) :

$\phi 3 \text{ m} \times 10 \text{ m H}$  : Gas Flow 250,000Nm<sup>3</sup>/h ( $V_g=9.82 \text{ m/s}$ )

150MW Class Coal Power Plant

➤ Maximum Size (Knockdown) :

$\phi 12 \text{ m} \times 12 \text{ m H}$  : Gas Flow 4,000,000Nm<sup>3</sup>/h ( $V_g=9.83 \text{ m/s}$ )

1,000 MW Class Coal Power Plant


## MU-SSPW Mixing Element




MU-SSPW  
Diameter : 1,800mm



Φ1,800 × 5,500mmH  
Gas Volume(wet) : 10,000 ~ 40,000 m<sup>3</sup>N/h  
Dust Content : In put 0.15 ~ 0.20 → Output 0.003 ~ 0.004g/m<sup>3</sup>N


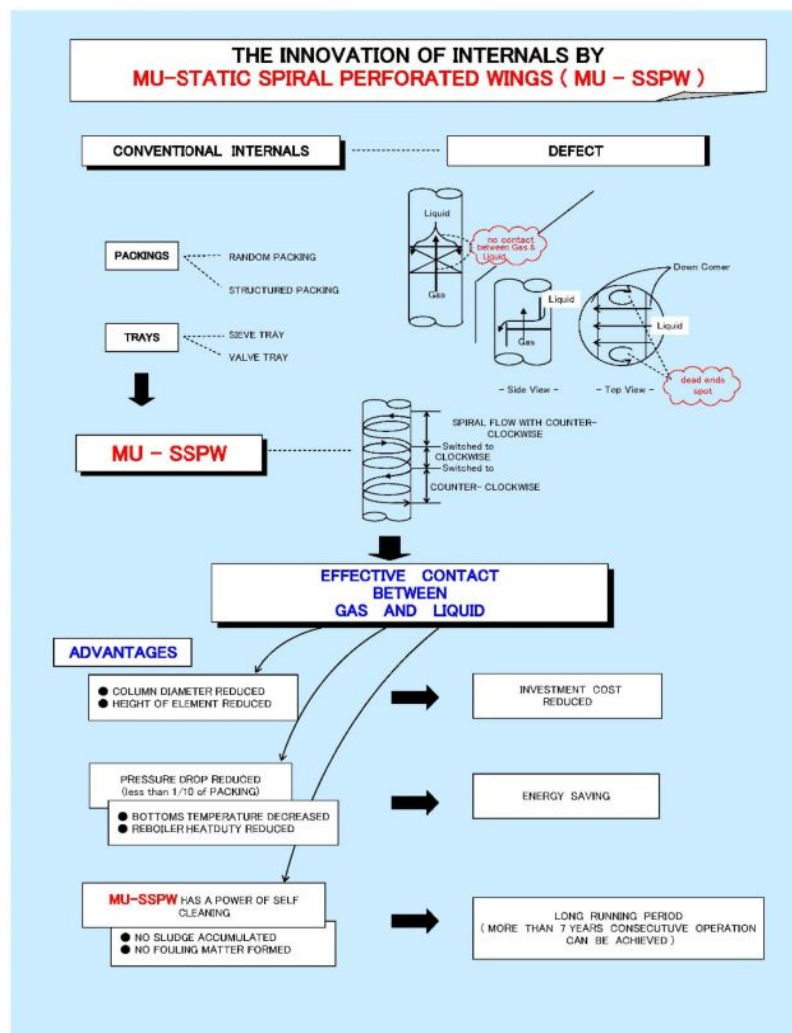


## Application of MU-SSPW Mixing Element for CO<sub>2</sub> Absorber & Stripper

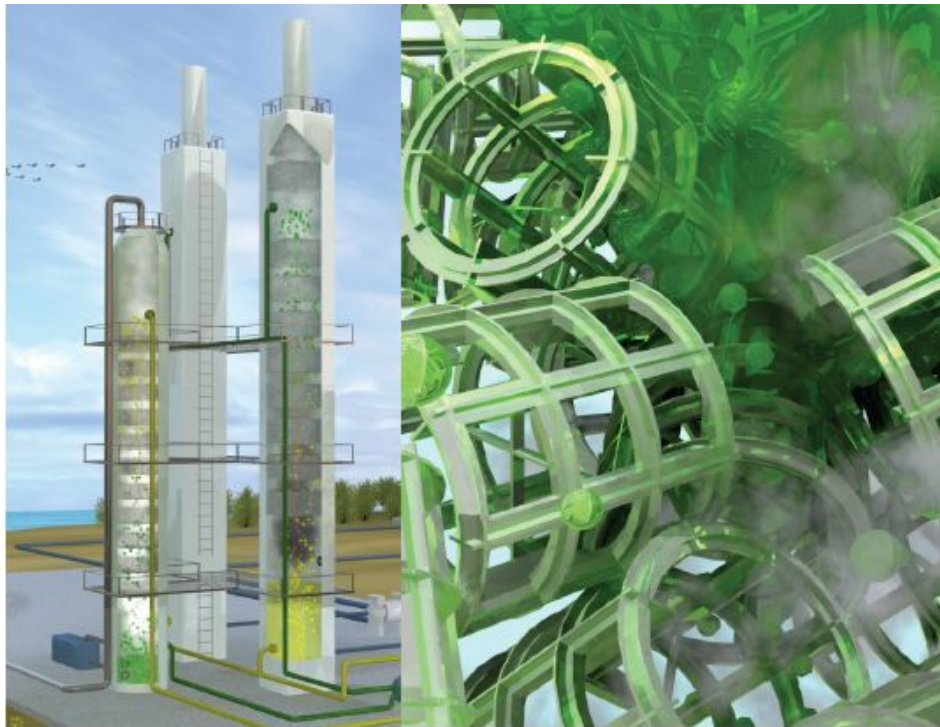

**Towers**

**Packing**

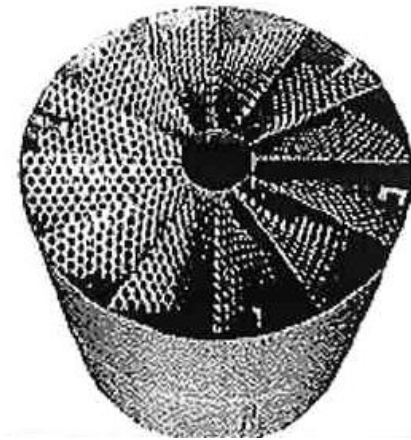

## Advantages of Using Mu Static Mixer for CO<sub>2</sub> Capture

- 1) Over 10% energy saving is achievable due to improved efficiency of absorption and degassing.
- 2) Contamination of solvent is prevented due to effective removal of dust and SO<sub>3</sub> fume, thus maintenance free. Also filtration system for mist in the solvent recycle line can be simplified.
- 3) Absorber/flash column are made compact due to excellent performance at high gas velocity inside the towers.
- 4) Improved efficiency of amine mist collection, etc., are possible.

Comparative Table of Packed Tower and Mu for CO<sub>2</sub> Degasser  
(at RICH solvent: 15t/hr and CO<sub>2</sub>: 480Kg/hr)

	Packed Tower	Mu
Gas/liquid contact Status	Countercurrent	Countercurrent
Gas velocity (m/sec)	<b>1</b>	<b>3</b>
Tower diameter (m)	<b>1</b>	<b>0.6</b>
Height of packing (m)	<b>9</b>	<b>5</b>
Steam consumption (Kg/h)	<b>4 6 3</b>	<b>4 0 8</b> (12% reduction)
Frequency of maintenance	Every year	Once every 5 years

## Advantages To Apply Mu Static Mixer

### **Saving of Maintenance Fee**

Fouling is drastically reduced by self-cleaning effect of Mu



Clean-up frequency is reduced to once every five years.

# Energy Saving

10% energy saving is achieved by three excellent advantages.

High  
Efficiency

- Separating efficiency is increased by Mu's dynamic vapor-liquid contact.

Low  
differential  
pressure

	Conventional packing	Mu
Differential pressure (kPa/m)	0.2	0.04 or lower

Effective  
Heat  
Recovery

Installation of internal reboiler at lower stage of column

# Reduction of Investment Cost

**High Efficiency  
(High technical  
advantages)**

**Smaller diameter of column**


	Conventional packing	Mu	
Column diameter	4m	1.8m	Mu can be smaller by more than 50%.
Vapor velocity	1m/sec	5m/sec	

**Lower height of column**

**No fouling**


- No spare equipment required
- Maintenance fee reduced.

### Mu System Flow Chart of CO2 Recovery From Exhaust Gas (Proposal 1)




1. Denitrificator
2. Dust remover
3. Desulfurizer


© Mu Co.,Ltd 2012

	Mu System Flow Chart of CO2 Recovery From Exhaust Gas
	Proposal 1
'12. 6. 4	 Mu Co. Ltd.


## Mu System Flow Chart of CO<sub>2</sub> Recovery From Exhaust Gas (Proposal 2) Combined Scheme of Absorber and Flash Column

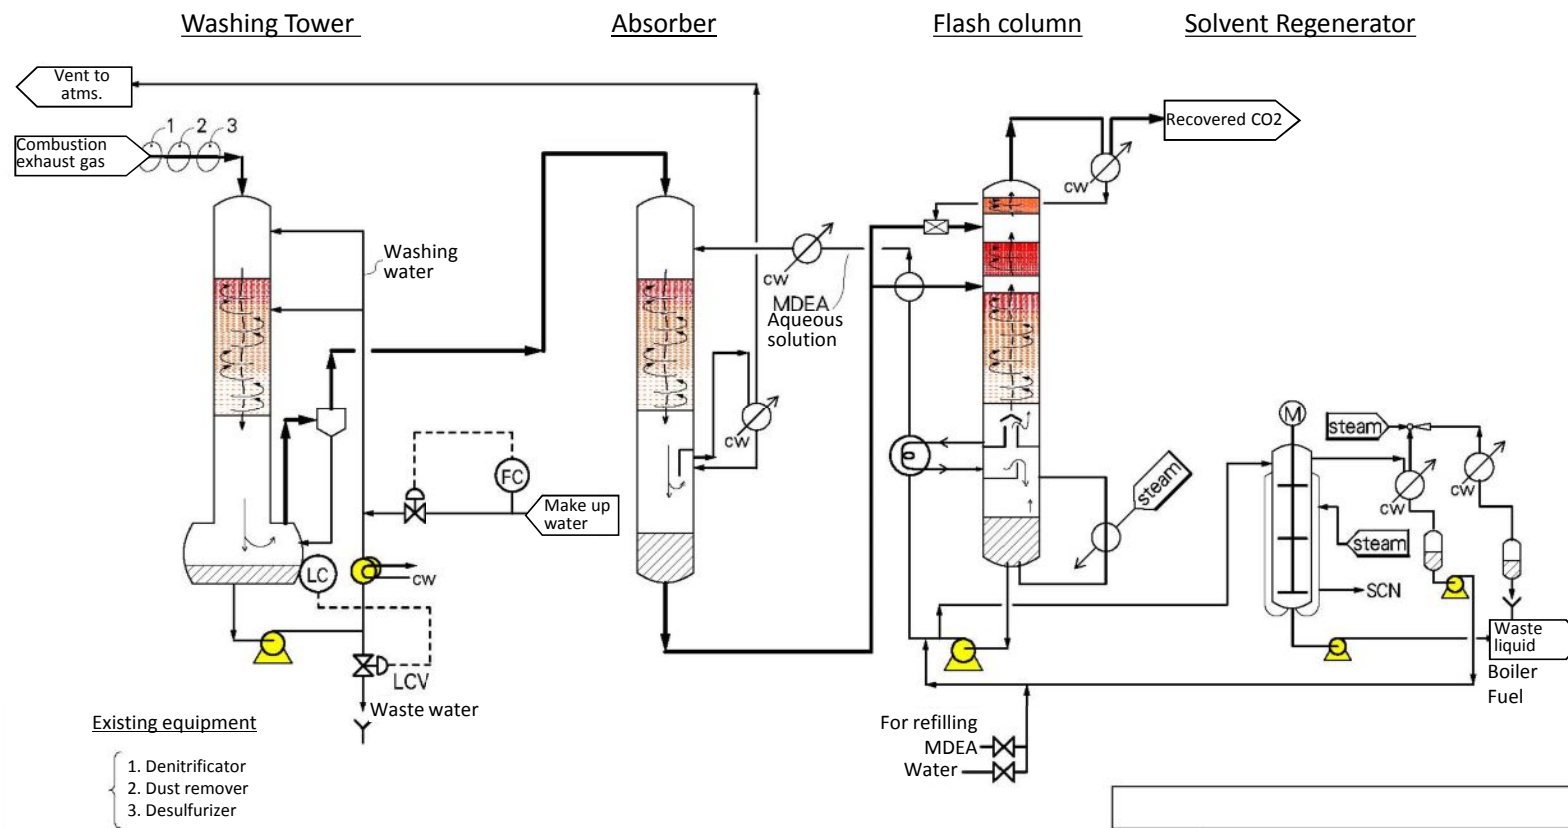


**1. Current Operational Status of Flash Column**

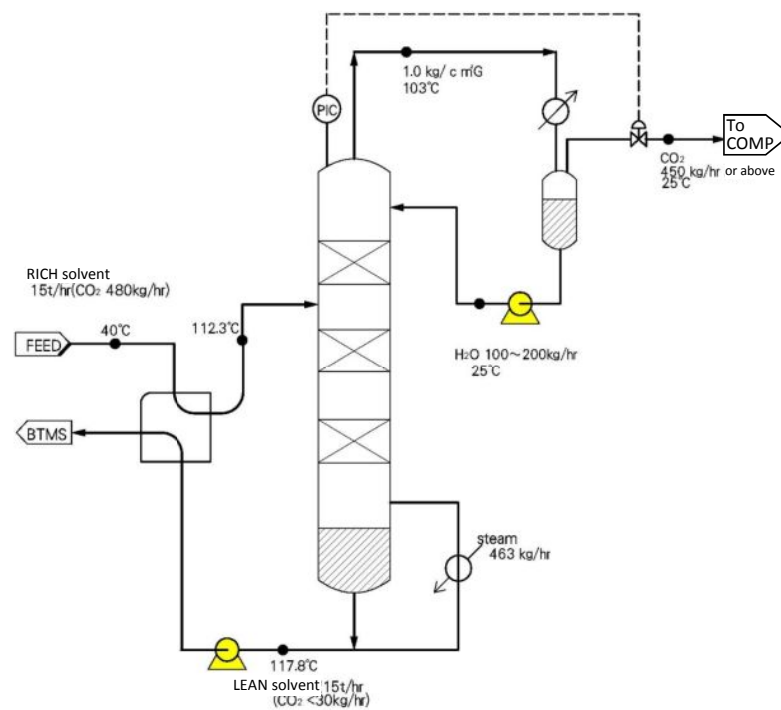


## 2. Simulation Modeling of Current Flash Column

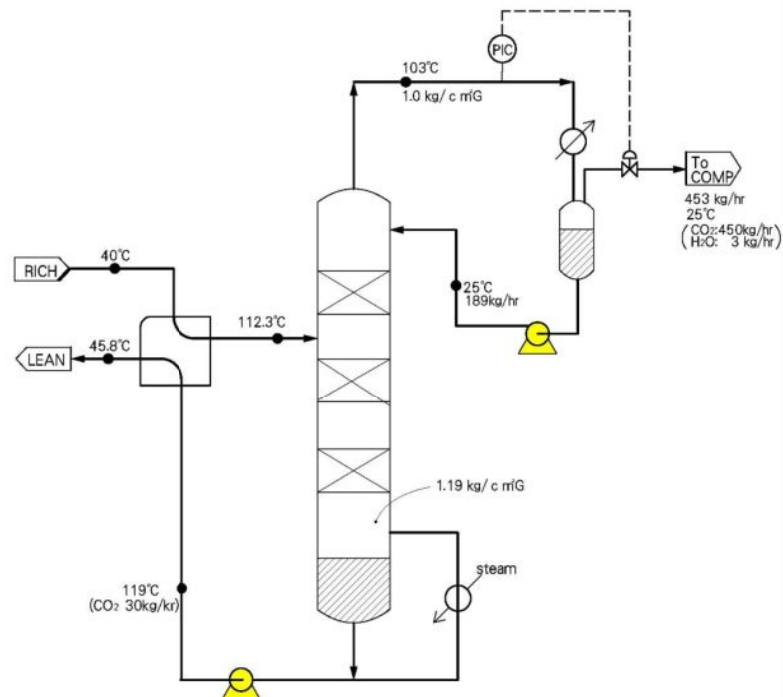



### 3. Proposed “Mu System” for Flash Column

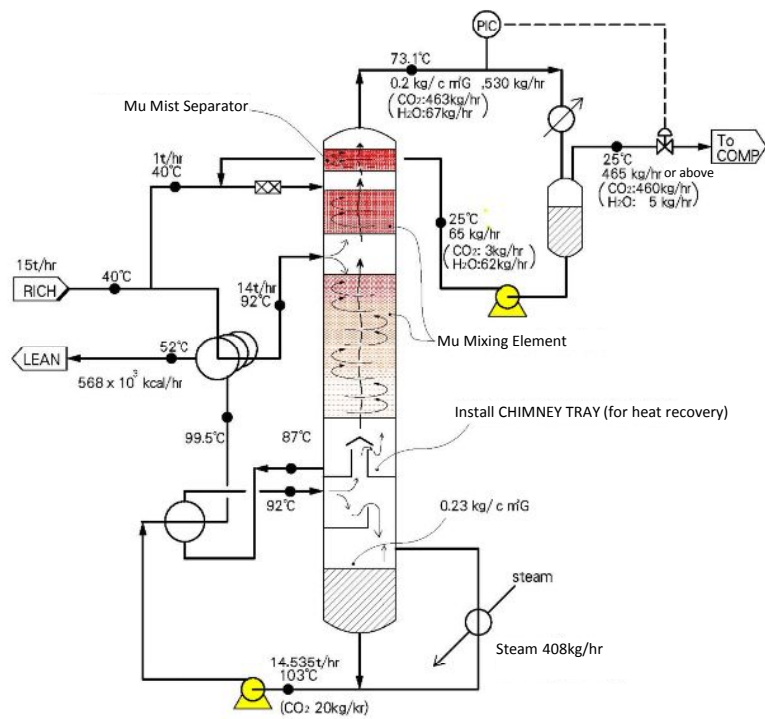

	Exhaust Gas Degassing Treatment Equipment
	3. Proposed "Mu System" for Flash Column
12.5.23	 Mu Co. Ltd.

#### 4. Proposed Control System for Flash Column

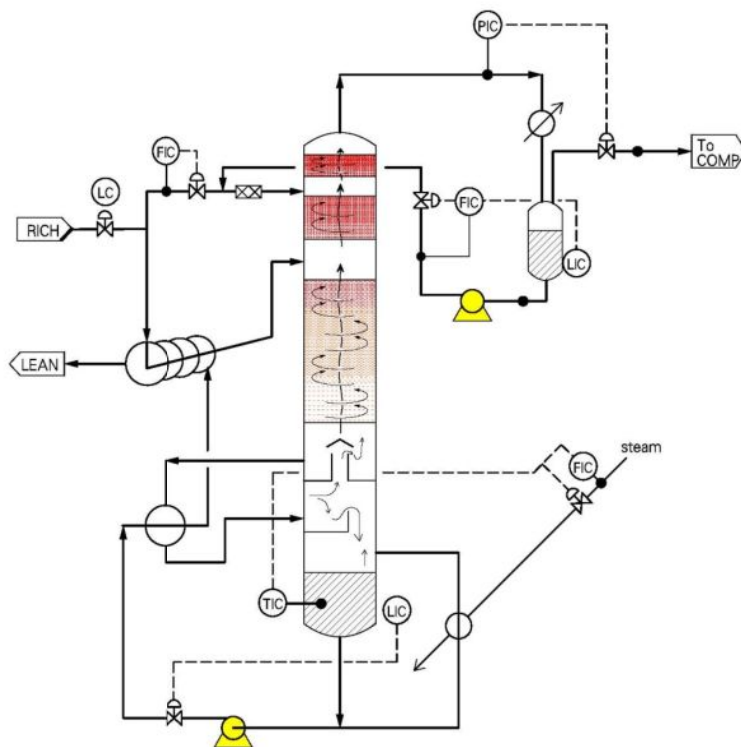

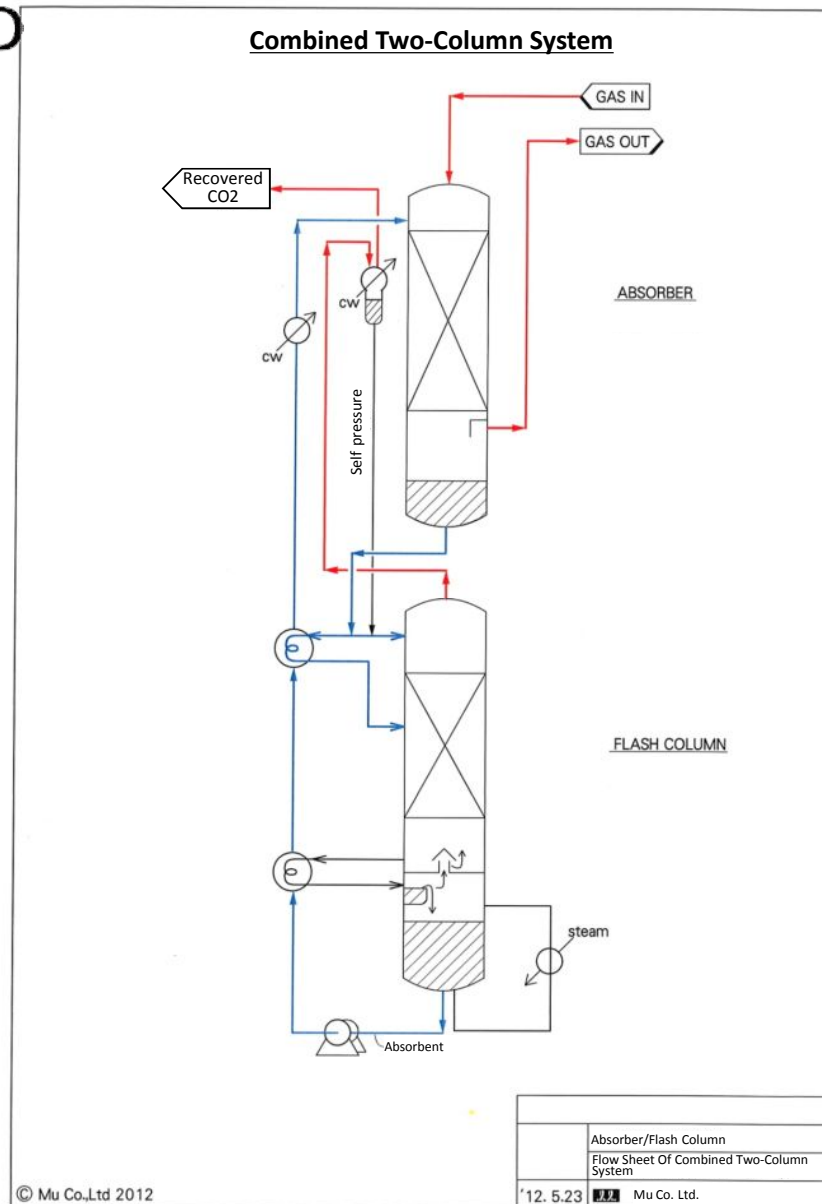

# Low Pressure Drop by Mu Static Mixer

COMPARISON BTWN MU AND SULZAR PACKING

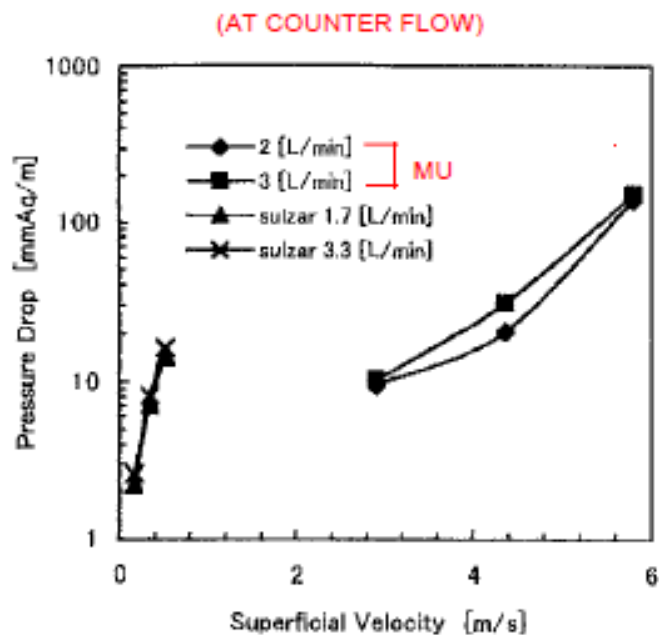


Fig.2 Relation between superficial velocity and pressure drop.

COMPARISON BTWN COUNTER FLOW AND PARALLEL FLOW BY MU


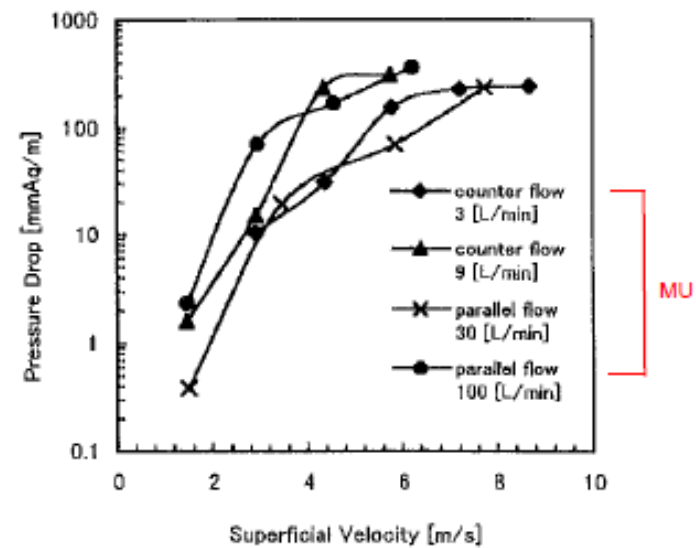


Fig.3 Relation between superficial velocity and pressure drop.

## Comparison of Pressure Drop MU-SSPW vs. Pall Ring (Alternate Current)

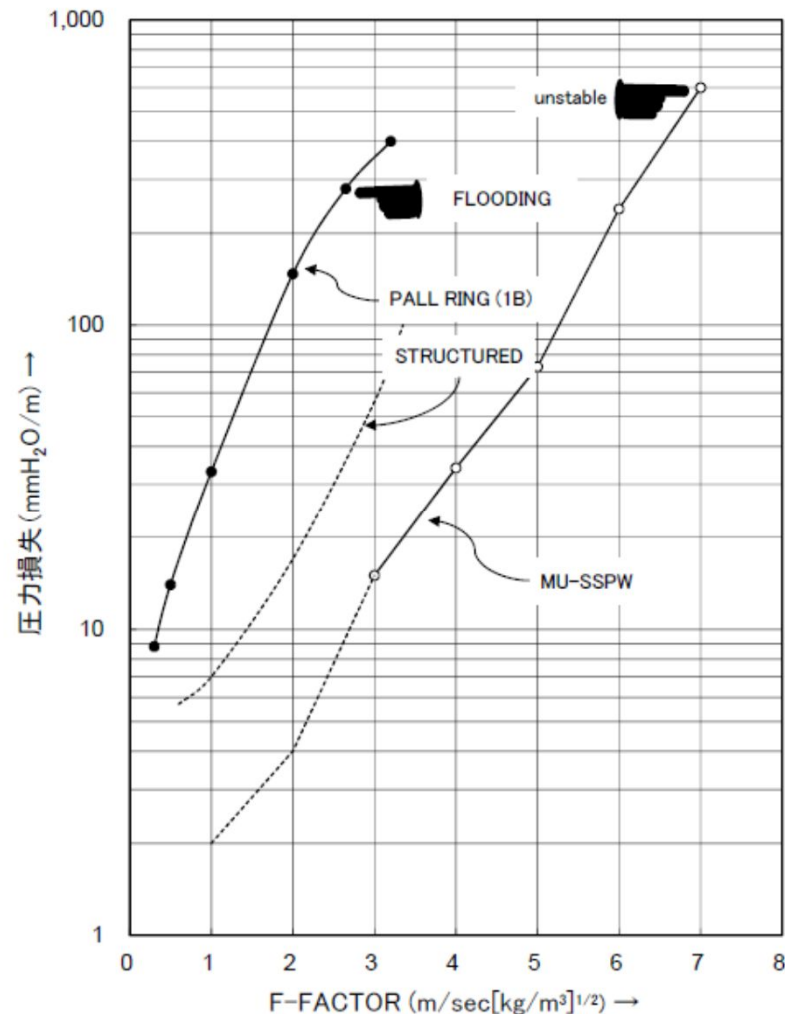

$$F - FACTOR = U_G \sqrt{\rho_G}$$

$U_G$  : Superficial Velocity (m / sec)

$\rho_G$  : Air Density (kg / m<sup>3</sup>)



### Measurement Condition

➤ Pressure : Atmosphere

➤ Fluid : Water & Air

➤ Water Flow Rate : 31m<sup>3</sup>/m<sup>2</sup>/hr

**MERIT BY ADOPTING MU-SSPW IN CCS**  
(RECOVERED CO<sub>2</sub> 300t/d BASIS)

INTERIALS	CURRENT PROCESS	USING MU-SSPW	MERIT
CCS SYSTEM			
COLUMN INTERNALS	CONVENTIONAL PACKING	MU-SSPW	
COLUMN			
<b>COOLING TOWER</b>			
1) FLUID CONTACT STATUS	COUNTER CURRENT	PARALLEL CURRENT	
2) DIAMETER	5.4 (m)	2.0 (m)	63% ↓
3) HEIGHT OF PACKING	4 (m)	2 (m)	50% ↓
4) GAS VELOCITY	1 (m <sup>3</sup> /sec)	7 (m <sup>3</sup> /sec)	
<b>CO<sub>2</sub> ABSORBER</b>			
1) FLUID CONTACT STATUS	COUNTER CURRENT	PARALLEL CURRENT	
2) DIAMETER	5.4 (m)	3.0 (m)	45% ↓
3) HEIGHT OF PACKING	8 (m)	5 (m)	38% ↓
4) GAS VELOCITY	1 (m <sup>3</sup> /sec)	3 (m <sup>3</sup> /sec)	
<b>CO<sub>2</sub> STRIPPER</b>			
1) FLUID CONTACT STATUS	COUNTER CURRENT	COUNTER CURRENT	
2) DIAMETER	1.8 (m)	1.0 (m)	50% ↓
3) HEIGHT OF PACKING	6 (m)	4 (m)	33% ↓
4) GAS VELOCITY	1 (m <sup>3</sup> /sec)	2 (m <sup>3</sup> /sec)	
STEAM CONSUMPTION	100 (%)	88 (%)	12% ↓ ENERGY SAVING
FREQUENCY OF MAINTENANCE	EVERY YEAR	ONCE EVERY 7 YEARS	NO FOULING & NO PLUGGING ↓ LOWER MAINTENANCE COST

 MU Company LTD

*K-Coal*  
*Clean Coal Technology*



Thank you!